



**Specification for Approval**

**Customer** : 株式会社アコン

**Part Name** : AC ADAPTER

**Description** : 24.0 Volts / 6.6 Amps

**Model No.** : ATS160T-P240 (LEVEL VI)

**Customer P / N** : ATS160T-P240-MS

**Product P / N** : ATS160TP240D15219

**Issued Date** : 07 - Sep. - 2022

**Version** : A1

**Issued Stamp** :

**Customer's Approval Signature**

**ADAPTER TECHNOLOGY CO.,LTD.**

**Office (Taiwan) : 6F-9, No.258, Liancheng Rd., Zhonghe District, New Taipei City 235, Taiwan (R.O.C.)**

**TEL : +886-2-8226-2279**

**FAX : +886-2-8226-2238**

**E-mail : service\_tw@ adaptertech.com.tw ; service@ adaptertech.com.tw**

**Factory (China) : BOAYANG ELECTRONICS CO., LTD.**



**158.4 W**  
**Switching Power Adapter**  
**SPECIFICATION**

**Model No.** : **ATS160T-P240 (LEVEL VI)**

---

**Description** : **24.0 Volts / 6.6 Amps**

---

**Part No.** : **ATS160TP240D15219**

---

**Version** : **A1**

---

**Date** : **07 – Sep. – 2022**

---

Approved	Reviewed	Checked	Prepared	Sales





## 1. Feature :

- ◆ **Input** : Universal 100 - 240 Vac / 50 - 60 Hz Input, without any slide switch.
- ◆ **Output** : +24.0 V / 0 – 6.6 A
- ◆ **Case Dimension** : 175.2 (L) \* 74 (W) \* 42 (H) mm ±1 mm
- ◆ **Efficiency** : Eff (av) ≥ 88%  
Eff ≥ 79%@10% load
- ◆ **Safety** : CUL / UL / GS / PSE / BSMI / RCM / CCC / UKCA
- ◆ **EMI** : CE / FCC (conduction & radiation Class B)
- ◆ **Protection** : OVP (Over Voltage Protection), SCP (Short Circuit Protection),  
OCP (Over Current Protection), OTP (Over Temperature Protection)
- ◆ **Suitable for usage at I.T.E., industrial controller**
- ◆ **Meet DoE Level VI/ ErP ( Lot 7 ) / GEMS / NRCan.**

## 2. Input :

2.1 Voltage	Universal 100 - 240 Vac, single phase
2.2 Frequency	50 - 60 Hz
2.3 Current	2.2 A Max.
2.4 Inrush Current	100 A Max. / 230 Vac (Cold start at 25°C, full load) ( ac source chroma 6530 )
2.5 Efficiency	Eff (av) ≥ 88% (At 115 Vac & 230 Vac) Eff ≥ 79%@10% load
2.6 Power Consumption	Pi ≤ 0.21 W (At 115 Vac & 230 Vac & At No load)
2.7 Power Factor (PF)	Pi ≥ 0.9 ( At Full load)

$$\text{※Eff (av)} = \frac{E_1 + E_2 + E_3 + E_4}{4}$$

$E_1$ =efficiency with 25% rated load,  $E_2$ = efficiency with 50% rated load  
 $E_3$ =efficiency with 75% rated load,  $E_4$ = efficiency with 100% rated load

## 3. Output :

3.1 DC Output	Voltage	+24.0 V ± 5%
	Current	6.6 A Max.
	Regulation	22.8 Vmin. ~ 24.0 Vtyp. ~ 25.2 Vmax.
	Ripple & Noise	240 mV Max.
	Total Power	158.4 W Max.

Remark : For ripple & noise measurement, use a 20MHz bandwidth frequency oscilloscope, and add a 0.1μF multilayer Cap. and a Low ESR Electrolytic Cap. (47 μF) at output connector terminals. (At nominal line voltage, full load)



## 4. Protection :

4.1 Over Voltage Protection (OVP)	Vout * 150% max. shut down
4.2 Over Current Protection(OCP)	Iout * 150% max. Autorecovery
4.3 Short Circuit Protection (SCP)	Autorecovery
4.4 Over Temperature Protection (OTP)	Shut down.

## 5. Safety requirement :

5.1. Dielectric strength : Cut off current 10 mA

(1)	Primary to secondary	3000 Vac (RMS) for 1 minute
(2)	Primary to Frame Ground	1770 Vac (RMS) for 1 minute
※ Secondary return isolated to FG		

5.2. Insulation resistance :

(1)	Primary to secondary	10 MΩ for 500 Vdc
(2)	Primary to Frame Ground	10 MΩ for 500 Vdc
※ Secondary return isolated to FG		

5.3 Leakage Current : Less than 3.5 mA

5.4 Grounding test : < 0.1Ω

## 6. Operation and Environment Performance :

6.1 Temperature Range

Operating	-20°C ~ + 40°C
Storage	-20°C ~ + 80°C

6.2 Humidity Range (Non-condensing)

Operating	20% ~ 80% RH
Storage	10% ~ 90% RH

6.3 Cooling : By natural air.

7. M.T.B.F. : 300,000 Hrs.(Calculated Hours at 25°C, By Telcordia SR-332)



## 8. Mechanical :

8.1 Weight : 700g Typical

8.2 Cable Type : Black UL2464 16AWG\*4C  
( Wire + Plug )


Plug : 4PIN DIN

8.3 Cable Length : 1500mm


8.4 Case Dimension : 175.2mm(L)\*74mm(W)\*42mm(H) ± 1mm

8.5 Material Flammability : UL 94V-0


8.6 External Appearance : As drawing below ( Scale → mm )

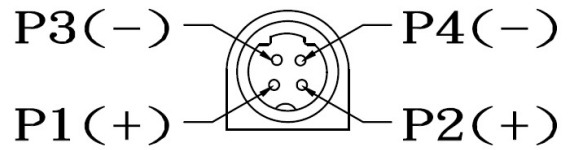


Output Cable Plug Pin Assignment

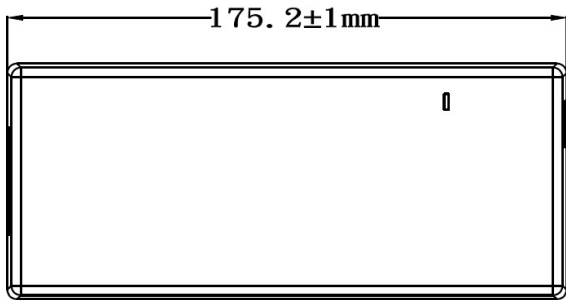


TOP-VIEW

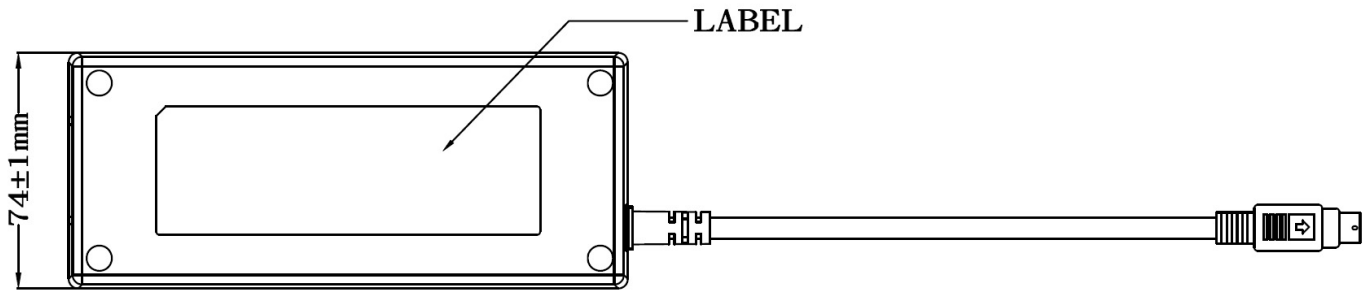

BOTTOM-VIEW

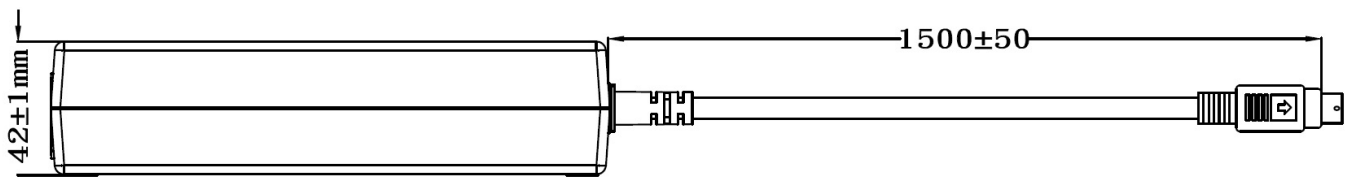

SIDE-VIEW



FRONT-VIEW



# Adapter Technology Co., Ltd.

8.7 Spec Label Materials : Metalized Polyester Label ( Silver Gloss )  
 Color : Black Background with Silver Printing  
 Label Dimension : 39mm(H)\*119mm(W)

## 100%

**ADAPTER TECH.**

AC ADAPTER 交換式電源供應器 / 电源适配器  
 P/N : ATS160T-P240-MS  
 Model (型號 / 型号) : ATS160T-P240  
 INPUT (輸入 / 输入) : 100-240V~50-60Hz 2.2A MAX.  
 OUTPUT (輸出 / 输出) : 24.0V  $\equiv$  6.6A 158.4W  
 FOR INDOOR USE ONLY

For use with information technology equipment only  
 Laite on Liitettävä suojakoskettimilla varustettuun pistorasiaan  
 Apparaten må tilkobles jordet stikkontakt  
 Apparaten skall anslutas till jordat uttag

仅限室内使用 此产品用于讯息技术设备

UKCA, CE, FCC, RoHS, etc.

PS E JET 株式会社アコン  
 I/P : 100-240V AC 50-60Hz 170VA-190VA 2.2A MAX.  
 O/P : 24V DC 6.6A 必ず接地接続を行って下さい。

D/C:2237  
 MADE IN CHINA  
 ID NO. A  
 XXX  
 中国制造

### "XXX"

Label supplier's code  
 It is accurate that the number  
 of words depends on the real  
 finished product

## 160%

**ADAPTER TECH.**

AC ADAPTER 交換式電源供應器 / 电源适配器  
 P/N : ATS160T-P240-MS  
 Model (型號 / 型号) : ATS160T-P240  
 INPUT (輸入 / 输入) : 100-240V~50-60Hz 2.2A MAX.  
 OUTPUT (輸出 / 输出) : 24.0V  $\equiv$  6.6A 158.4W  
 FOR INDOOR USE ONLY

For use with information technology equipment only  
 Laite on Liitettävä suojakoskettimilla varustettuun pistorasiaan  
 Apparaten må tilkobles jordet stikkontakt  
 Apparaten skall anslutas till jordat uttag

仅限室内使用 此产品用于讯息技术设备

UKCA, CE, FCC, RoHS, etc.

PS E JET 株式会社アコン  
 I/P : 100-240V AC 50-60Hz 170VA-190VA 2.2A MAX.  
 O/P : 24V DC 6.6A 必ず接地接続を行って下さい。

D/C:2237  
 MADE IN CHINA  
 ID NO. A  
 XXX  
 中国制造

# Label Part No:9443126110



## A. Line Regulation Test

Test Result :

Test condition	Spec.	Reading 1	Reading 2	Reading 3
90 Vac / 50% Load	22.8 V ~ 25.2 V	23.81 V	23.69 V	24.04 V
115 Vac / 50% Load	22.8 V ~ 25.2 V	23.81 V	23.69 V	24.04 V
132 Vac / 50% Load	22.8 V ~ 25.2 V	23.81 V	23.69 V	24.04 V
180 Vac / 50% Load	22.8 V ~ 25.2 V	23.81 V	23.69 V	24.04 V
230 Vac / 50% Load	22.8 V ~ 25.2 V	23.81 V	23.69 V	24.04 V
264 Vac / 50% Load	22.8 V ~ 25.2 V	23.81 V	23.69 V	24.04 V

## B. Efficiency Test

Test Result :

Test condition	Spec.	Reading 1	Reading 2	Reading 3
115 Vac	88% Min.	91.19%	90.78%	91.19%
230 Vac	88% Min.	92.36%	92.01%	92.36%
230 Vac@10% load	79% min	86.06%	85.90%	86%

$$\text{Eff (av)} = \frac{E_1 + E_2 + E_3 + E_4}{4}$$

$E_1$ =efficiency with 25% rated load,  $E_2$ = efficiency with 50% rated load  
 $E_3$ =efficiency with 75% rated load,  $E_4$ = efficiency with 100% rated load

## C. Load Regulation Test

Test Result :

Test condition	Spec.	Reading 1	Reading 2	Reading 3
115 Vac / 0% Load	22.8 V ~ 25.2 V	23.95 V	23.83 V	24.15 V
115 Vac / 50% Load	22.8 V ~ 25.2 V	23.81 V	23.69 V	24.04 V
115 Vac / 100% Load	22.8 V ~ 25.2 V	23.68 V	23.55 V	23.92 V
230 Vac / 0% Load	22.8 V ~ 25.2 V	23.95 V	23.83 V	24.16 V
230 Vac / 50% Load	22.8 V ~ 25.2 V	23.82 V	23.69 V	24.04 V
230 Vac / 100% Load	22.8 V ~ 25.2 V	23.68 V	23.55 V	23.92 V

## D. Ripple & Noise Test

Test Result :

Test condition	Spec.	Reading 1	Reading 2	Reading 3
115 Vac / 100% Load	240 mV Max.	41.2 mV	53.1mV	45.1mV
230 Vac / 100% Load	240 mV Max.	46.6 mV	55.6mV	50.6mV



## E. Inrush Current

Test Result :

Test condition	Spec.	Reading 1	Reading 2	Reading 3
230 Vac / 100% Load	100 A Max.	71.8 A	69.8 A	70.1 A

## F. Over Voltage Protection

Test Result :

Test condition	Spec.	Reading 1	Reading 2	Reading 3
115 Vac	Vout*150% Max.	118%	119%	118%
230 Vac	Vout*150% Max.	117%	119%	119%

## G. Over Current Protection

Test Result :

Test condition	Spec.	Reading 1	Reading 2	Reading 3
115 Vac / 100% Load	Iout*150% Max.	127%	127%	129%
230 Vac / 100% Load	Iout*150% Max.	128%	128%	129%

## H. Short Circuit Protection

Test Result :

Test condition	Spec.	Reading 1	Reading 2	Reading 3
115 Vac / 100% Load	Shut down	OK	OK	OK
230 Vac / 100% Load	Shut down	OK	OK	OK

## I. Input Power Consumption(No Load)

Test Result :

Test condition	Spec.	Reading 1	Reading 2	Reading 3
230 Vac / 0% Load	$\leq 0.21$ W	0.16 W	0.16 W	0.16 W

## J. Power Factor

Test Result :

Test condition	Spec.	Reading 1	Reading 2	Reading 3
115 Vac / 100% Load	$\geq 0.9$	0.991	0.991	0.991
230 Vac / 100% Load	$\geq 0.9$	0.948	0.964	0.954



# Adapter Technology Co., Ltd.

## Efficiency Test Report


- A. Model Number : AT5160T-P240 (24V/6.6A)
- B. DC Power Cord : UL2464 , 16AWG , 1.5M
- C. Average Efficiency :
- |                       |       |      |
|-----------------------|-------|------|
| Erp ( LOT 7 )         | 88.0% | Min. |
| DoE Level VI          | 88.0% | Min. |
| GEMS Level VI         | 88.0% | Min. |
| CoC Tier 2            | 89.0% | Min. |
| CoC Tier 2 (10% Load) | 79.0% | Min. |
- D. NO Load Power Consumption :
- |               |            |
|---------------|------------|
| Erp ( LOT 7 ) | 0.21W Max. |
| DoE Level VI  | 0.21W Max. |
| GEMS Level VI | 0.21W Max. |
| CoC Tier 2    | 0.15W Max. |
- E. Testing Dequpment :
- |                    |                |        |
|--------------------|----------------|--------|
| a. AC Power Source | : " Chroma "   | 6600   |
| b. Electronic Load | : " PRODIGIT " | 3311F  |
| c. Power Meter     | : " YOKOGAWA " | WT-210 |
| d. Digital Meter   | : " ITALLA "   | HT326  |
- F. AC Input Voltage : 115Vac/60Hz

	100%* I <sub>0</sub>	75%* I <sub>0</sub>	50%* I <sub>0</sub>	25%* I <sub>0</sub>	10%* I <sub>0</sub>	0%* I <sub>0</sub>
Rms Output Current(mA)	6600mA	4950mA	3300mA	1650mA	660mA	0mA
Rms Output Voltage(V)	23.950V	24.010V	24.070V	24.130V	24.15V	24.170V
Active Output Power(W)	158.07W	118.85W	79.43W	39.81W	15.94W	0.00W
Rms Input Voltage(V)	115V	115V	115V	115V	115V	115V
Rms Input Current(A)	1.542A	1.149A	0.768A	0.398A	0.198A	0.023A
Rms Input Power(W)	174.87W	130.05W	86.34W	43.77W	18.78W	0.12W
Total Harmonic Distortion of the input current	11.7A%	13.5A%	16.6A%	22.1A%	27.3A%	9.9A%
True Power Factor	0.991	0.987	0.980	0.958	0.808	0.063
Power Consumed by UUT(W)	16.80W	11.20W	6.91W	3.96W	2.84W	0.12W
Efficiency	90.39%	91.39%	92.00%	90.96%	84.87%	*
Average Efficiency	91.19%				84.87%	*

- G. AC Input Voltage : 230Vac/50Hz

	100%* I <sub>0</sub>	75%* I <sub>0</sub>	50%* I <sub>0</sub>	25%* I <sub>0</sub>	10%* I <sub>0</sub>	0%* I <sub>0</sub>
Rms Output Current(mA)	6600mA	4950mA	3300mA	1650mA	660mA	0mA
Rms Output Voltage(V)	23.950V	24.010V	24.070V	24.130V	24.15V	24.180V
Active Output Power(W)	158.07W	118.85W	79.43W	39.81W	15.94W	0.00W
Rms Input Voltage(V)	230V	230V	230V	230V	230V	230V
Rms Input Current(A)	0.7738/	0.586A	0.402A	0.235A	0.170A	0.033A
Rms Input Power(W)	171.66W	128.45W	86.01W	43.05W	18.52W	0.16W
Total Harmonic Distortion of the input current	18.0A%	20.8A%	25.5A%	26.4A%	67.4A%	6.7A%
True Power Factor	0.966	0.954	0.930	0.797	0.473	0.027
Power Consumed by UUT(W)	0.95W	9.60W	6.58W	3.24W	2.58W	0.16W
Efficiency	92.08%	92.53%	92.35%	92.48%	86.06%	*
Average Efficiency	92.36%				86.06%	*

Tester : jeff.Huang





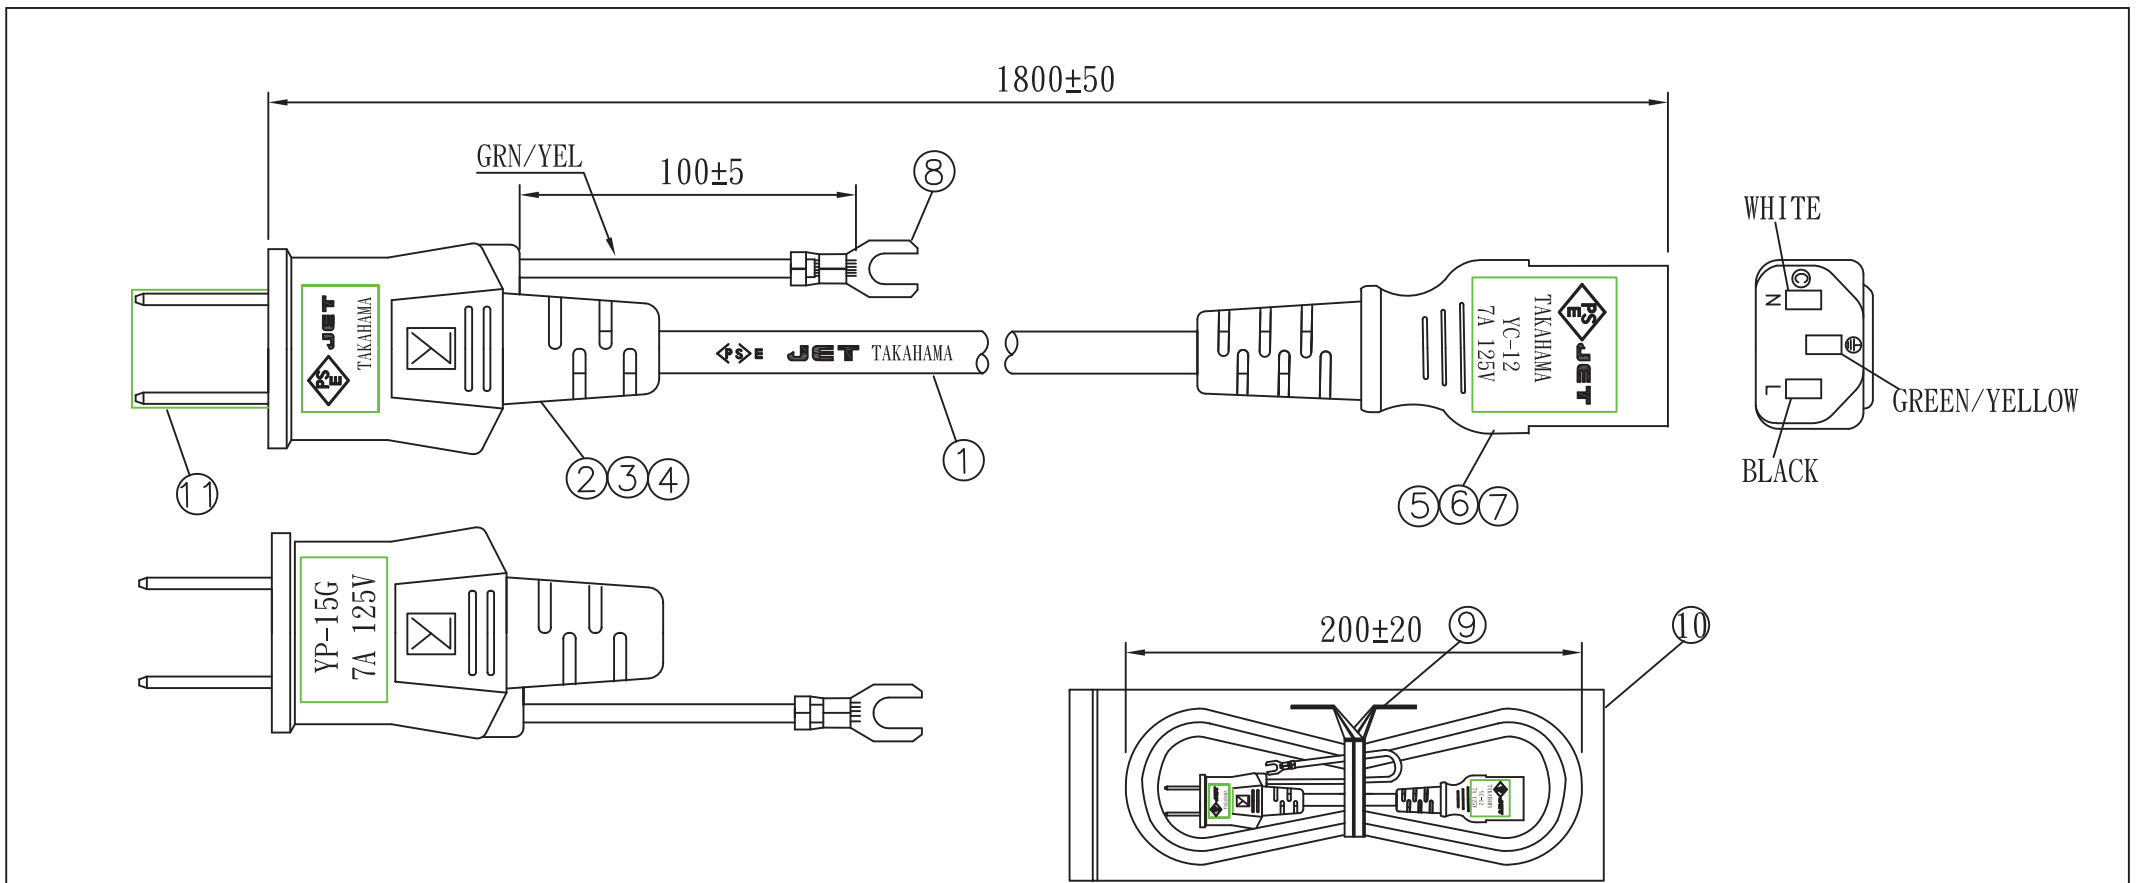


NO.	SPECIFICATION	Q' TY	REMARK
1	VCTF 0.75/3C BLACK PSE	1PC	
2	YP-15G TER:98675BS-1	2PCS	
3	TP-15G INNER BODY	1PC	
4	YP-15G PVC PLASTIC:50P BLACK	23g/PC	
5	YC-12 PVC PLASTIC:50P BLACK	18g/PC	
6	YC-12 TER:97740PS-0	3PCS	
7	YC-12 INNER BODY	1PC	
8	"Y"TER:96552BS-2	1PC	
9	MINI TIE:L=130mm	1PC	
10	LOCK BAG:250*110*0.04mm	1PC	
11	SLEEVE WHITE	1PC	

CORD MARKING:

《P》E JET TAKAHAMA VCTF 3G 0.75mm<sup>2</sup> 20XX -F-

Tolerance >0±0.30 >1.0±0.50 >10.0±1.0 >20.0±2.0 Angle: ±1°	Approved	Date		<b>YUNG LI CO.,LTD</b>				
	Checked	Date						
	Drawn	黃 方	Date	15.12.24	Customer	阿達特		
	Cat. No.	YP-15G/YC-12			P/N.	R427A218011		
Drawing No.	CY-P0335		Rev.	B	Material	P.V.C	Unit	mm
					HEFT(g)		⊕	≡

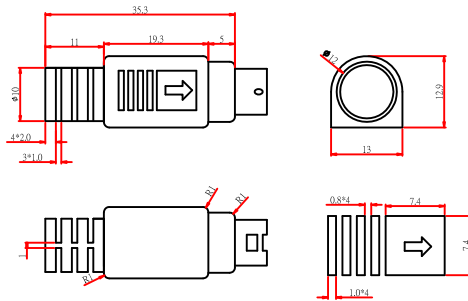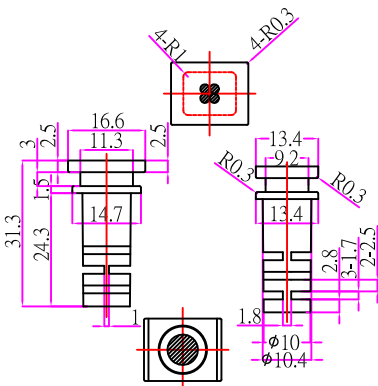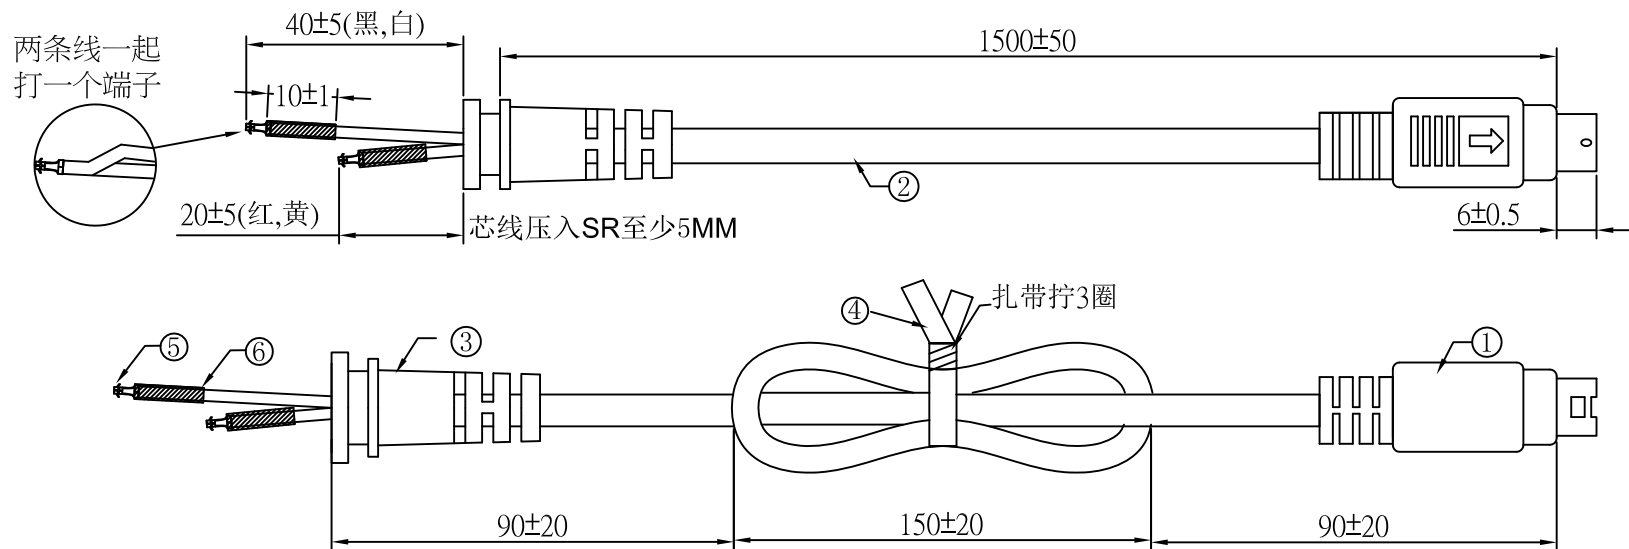

正面圖

芯線	黃色	紅色	白色	黑色
PIN	P1	P2	P3	P4

注意:此圖面所需材料符合"ROHS"標準

- ① 4PIN 粗針公頭成型式, 外模P-180号, 单箭头, 大网尾, 用料PVC 60P 黑色
- ② UL 2464 16AWG(0.16\*65)\*4C(紅,黑,白,黃)过粉线 BK亮 OD:7.1 裁線長度:1560+10/-0
- ③ SR-511号模,用料PVC60P黑色 :吊重:1米/20磅/60秒
- ④ PE无鐵芯紮帶14CM BK
- ⑤ 2.9双钩机板端\*2PCS(进文提供:P1811-U)
- ⑥ 热缩套管(黑色): $\phi 4*10*2$ Pcs
- ⑦ 單位:MM




1.0mm以下	±0.1mm	15.0mm以下	±0.6mm
2.0mm以下	±0.15mm	20.0mm以下	±0.8mm
3.0mm以下	±0.20mm	30.0mm以下	±1.0mm
10.0mm以下	±0.50mm	30.0mm以上	±1.2mm

02	线材OD	2018/03/03
01	新出	2015/11/09
版次	变更内容	日期

料號	R44R1515011A		
客戶	阿達特	制圖	陶胜英
頁數	01	審核	
		批準	

泰岳電子有限公司			
圖號	ADT-3683	日期	2018/03/03

		REVISIONS			
SHOW	REV	DESCRIPTION	DATE	APPROVED	
△	A	初版制作	20/11/07	SUN	

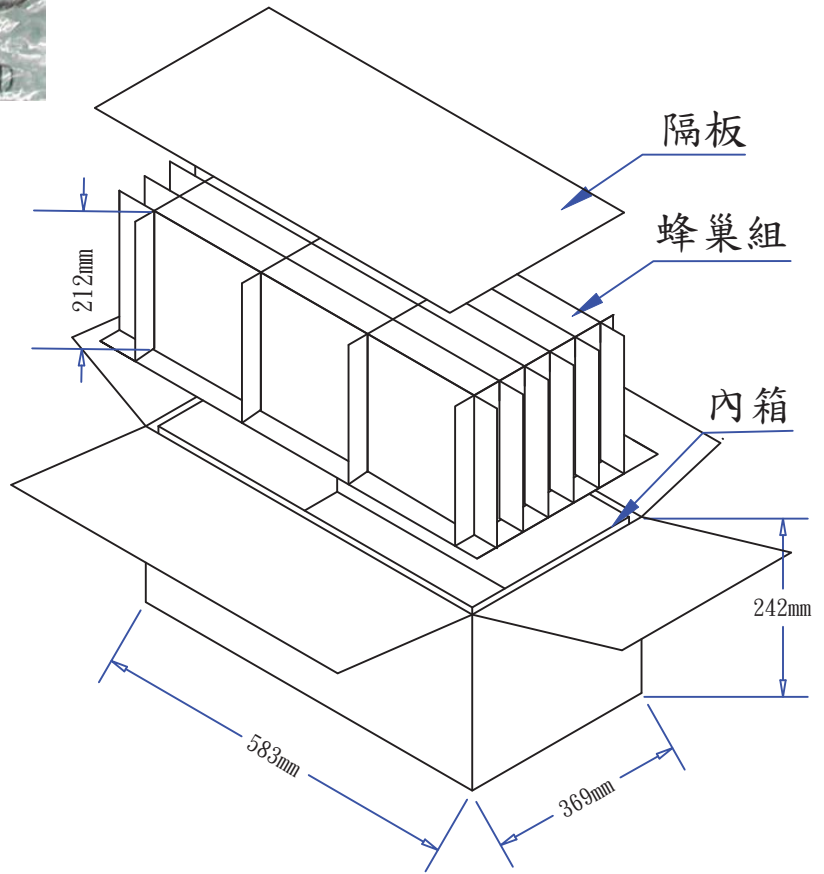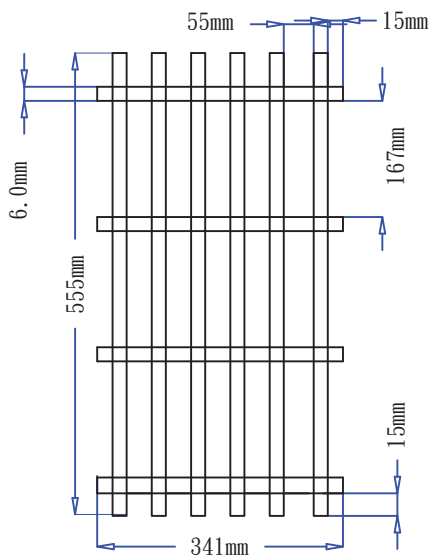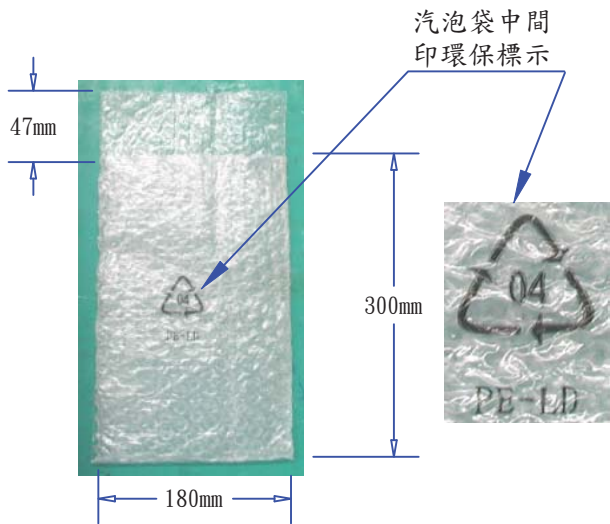

**PIS160W0009 包裝(FOR 160W+AC CORD)(K=K)-環保雙面氣泡袋-內箱-邊分-15**

- |                            |                                    |     |      |
|----------------------------|------------------------------------|-----|------|
| <a href="#">9550046401</a> | 1. 隔板:555(L)*341(W)*6mm            | K=K | 2/15 |
| <a href="#">9520073001</a> | 2. 數量:3*5*1=15PCS                  |     |      |
| <a href="#">9520073101</a> | 3. 內箱:569(L)*355(W)*224(H)mm(無上下蓋) | K=K | 1/15 |
| <a href="#">9560044801</a> | 4. 外箱:583(L)*369(W)*242(H)mm       | K=K | 1/15 |
| <a href="#">9560044901</a> | 5. 4刀卡:555(L)*212(W)*6mm(邊分)       | K=K | 6/15 |
| <a href="#">9540005101</a> | 6. 6刀卡:341(L)*212(W)*6mm(邊分)       | K=K | 4/15 |
7. 環保雙面汽泡袋:300(L)\*180(W)\*47mm 無色透明, 中間位置須加印環保標示. 1/1  
8. 將成品放入氣泡袋中, 銘板與環保標示同一側, SR部份朝上裝入蜂巢內, AC線裝入蜂巢位於DC線側, 方向須統一.  
9. 外箱標示為外徑尺寸, 以上材料需符合RoHS標準.



阿達特科技股份有限公司  
Adapter Technology Co., Ltd.

DRAWING NO. <b>PIS160W0009</b>		APPROVAL 1 BY		
UNIT	MODEL NO 160W+AC CORD+內箱	APPROVAL 2 BY		
mm	FILE NO. ADT-0713	CHECKED BY(ENGINEER)	Sun	2020/11/07
SCALE	REV. A	SHEET 1/1	DRAWN BY	Moon
				2020/11/07
Apply for sales		Apply for engineer		Use the sales



# Adapter Technology Co, Ltd

8.7 Spec Label Materials : Metalized Polyester Label ( Silver Gloss )  
 Color : Black Background with Silver Printing  
 Label Dimension : 39mm(H)\*119mm(W)

## 100%

**ADAPTER TECH.**  
 AC ADAPTER 交換式電源供應器 / 电源适配器  
 P/N : ATS160T-P240-MS  
 Model (型號 / 型号) : ATS160T-P240  
 INPUT (輸入 / 输入) : 100-240V~50-60Hz 2.2A MAX.  
 OUTPUT (輸出 / 输出) : 24.0V === 6.6A 158.4W  
 FOR INDOOR USE ONLY

For use with information technology equipment only  
 Laite on Liitettävä suojakoskettimilla varustettuun pistorasiaan  
 Apparaten må tilkobles jordet stikkontakt  
 Apparaten skall anslutas till jordat uttag  
 仅限室内使用 此产品用于讯息技术设备

**UK CA** **10** **CCC** **R33154 RoHS** **UL US LISTED POWER SUPPLY 60JJ E225703**  
**CE** **Nemko GS** **FC** **PS E JET 株式会社アコン**  
 I/P : 100-240V AC 50-60Hz 170VA-190VA 2.2A MAX.  
 O/P : 24V DC 6.6A 必ず接地接続を行って下さい。

**D/C:2237**  
**MADE IN CHINA**  
 ID NO. A  
 XXX  
 中国製造

## "XXX"

Label supplier's code  
 It is accurate that the number of words depends on the real finished product

## 160%

**ADAPTER TECH.**  
 AC ADAPTER 交換式電源供應器 / 电源适配器  
 P/N : ATS160T-P240-MS  
 Model (型號 / 型号) : ATS160T-P240  
 INPUT (輸入 / 输入) : 100-240V~50-60Hz 2.2A MAX.  
 OUTPUT (輸出 / 输出) : 24.0V === 6.6A 158.4W  
 FOR INDOOR USE ONLY


For use with information technology equipment only  
 Laite on Liitettävä suojakoskettimilla varustettuun pistorasiaan  
 Apparaten må tilkobles jordet stikkontakt  
 Apparaten skall anslutas till jordat uttag  
 仅限室内使用 此产品用于讯息技术设备

**UK CA** **10** **CCC** **R33154 RoHS** **UL US LISTED POWER SUPPLY 60JJ E225703**  
**CE** **Nemko GS** **FC** **PS E JET 株式会社アコン**  
 I/P : 100-240V AC 50-60Hz 170VA-190VA 2.2A MAX.  
 O/P : 24V DC 6.6A 必ず接地接続を行って下さい。

**D/C:2237**  
**MADE IN CHINA**  
 ID NO. A  
 XXX  
 中国製造

# Label Part No:9443126110



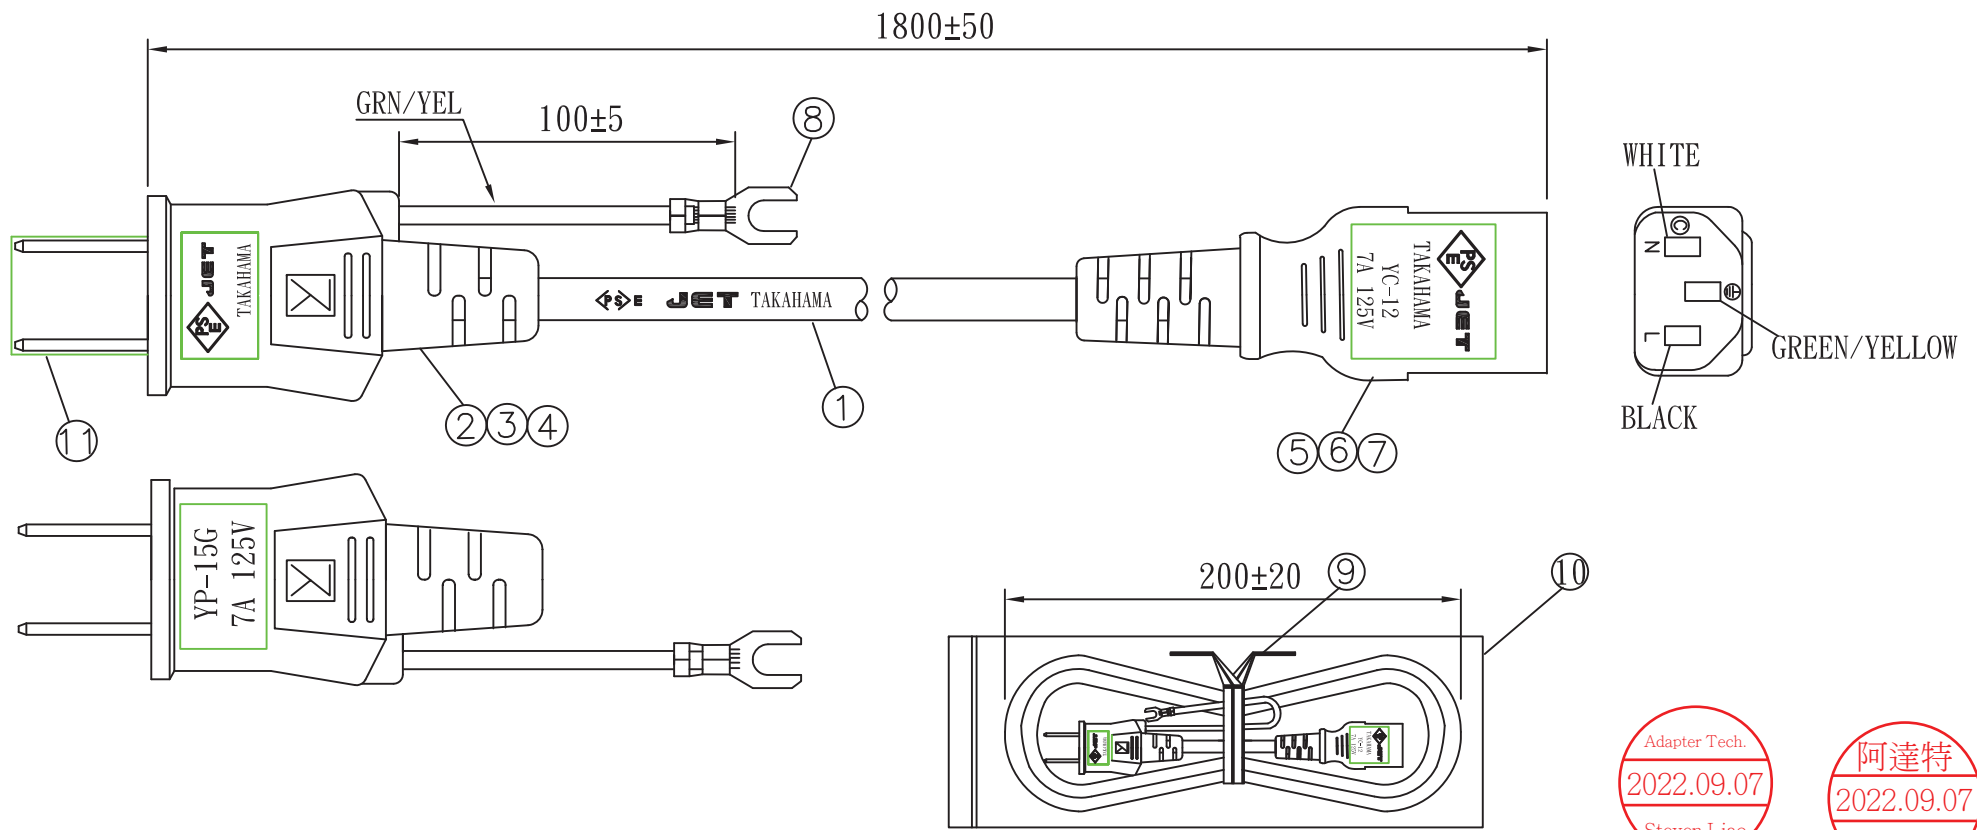

Adapter Tech.  
2022.09.07  
Steven Liao





阿達特  
2022.09.07  
黃翔宇

NO.	SPECIFICATION	Q' TY	REMARK
1	VCTF 0.75/3C BLACK PSE	1PC	
2	YP-15G TER:98675BS-1	2PCS	
3	TP-15G INNER BODY	1PC	
4	YP-15G PVC PLASTIC:50P BLACK	23g/PC	
5	YC-12 PVC PLASTIC:50P BLACK	18g/PC	
6	YC-12 TER:97740PS-0	3PCS	
7	YC-12 INNER BODY	1PC	
8	"Y"TER:96552BS-2	1PC	
9	MINI TIE:L=130mm	1PC	
10	LOCK BAG:250*110*0.04mm	1PC	
11	SLEEVE WHITE	1PC	

CORD MARKING:

《P》E JET TAKAHAMA VCTF 3G 0.75mm<sup>2</sup> 20XX -F-

Tolerance >0±0.30 >1.0±0.50 >10.0±1.0 >20.0±2.0 Angle: ±1°	Approved	Date		<b>YUNG LI CO.,LTD</b>				
	Checked	Date						
	Drawn	黃方	Date	15.12.24	Customer	阿達特		
	Cat. No.	YP-15G/YC-12			P/N.	R427A218011		
Drawing No.	CY-P0335		Rev.	B	Material	P.V.C	Unit	mm
					HEFT(g)		⊕	≡

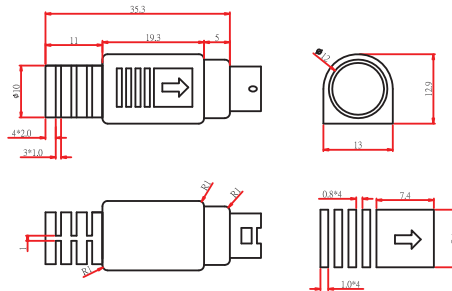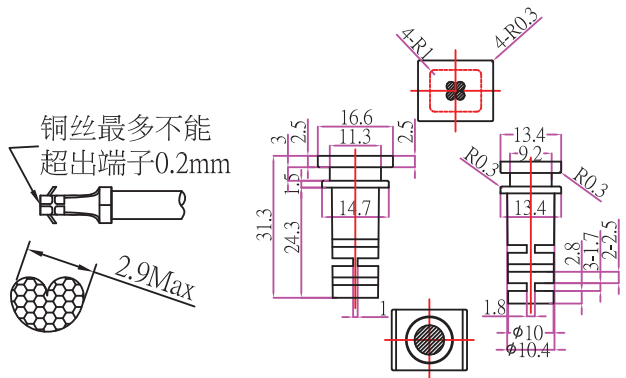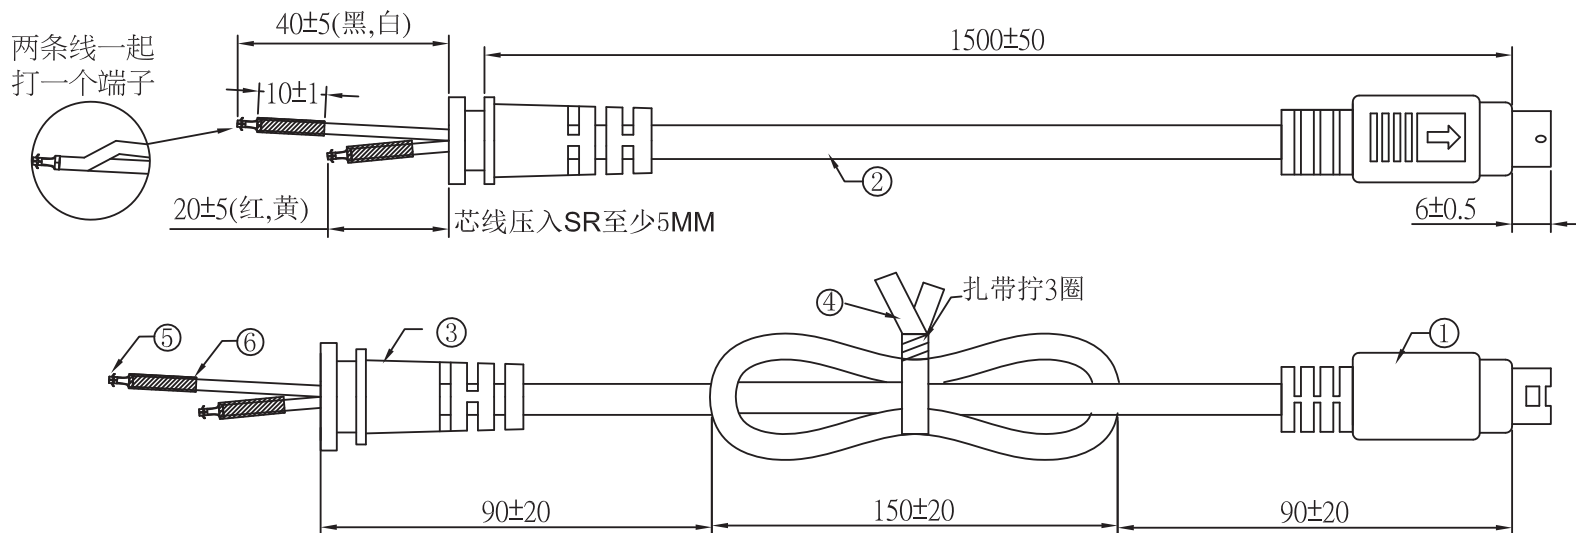

正面圖

芯線	黃色	紅色	白色	黑色
PIN	P1	P2	P3	P4

注意:此圖面所需材料符合"ROHS"標準

- ① 4PIN 粗針公頭成型式, 外模P-180号, 单箭头, 大网尾, 用料PVC 60P 黑色
- ② UL 2464 16AWG(0.16\*65)\*4C(紅,黑,白,黃)过粉线 BK亮 OD:7.1 裁線長度:1560+10/-0
- ③ SR-511号模,用料PVC60P黑色 :吊重:1米/20磅/60秒
- ④ PE无鐵芯紮帶14CM BK
- ⑤ 2.9双钩机板端\*2PCS(进文提供:P1811-U)
- ⑥ 热缩套管(黑色): $\phi 4 \times 10 \times 2$ Pcs
- ⑦ 單位:MM






1.0mm以下	$\pm 0.1$ mm	15.0mm以下	$\pm 0.6$ mm
2.0mm以下	$\pm 0.15$ mm	20.0mm以下	$\pm 0.8$ mm
3.0mm以下	$\pm 0.20$ mm	30.0mm以下	$\pm 1.0$ mm
10.0mm以下	$\pm 0.5$ mm	30.0mm以上	$\pm 1.2$ mm

02	线材OD	2018/03/03
01	新出	2015/11/09
版次	变更内容	日期

料號	R44R1515011A		
客戶	阿達特	制圖	陶胜英
頁數	01	審核	
		批准	
泰岳電子有限公司			
圖號	ADT-3683	日期	2018/03/03

<input checked="" type="checkbox"/> 用膠帶封口 <input type="checkbox"/> 無需膠帶封口	REVISIONS				
	SHOW	REV	DESCRIPTION	DATE	APPROVED
	△	A	初版制作	20/11/07	SUN

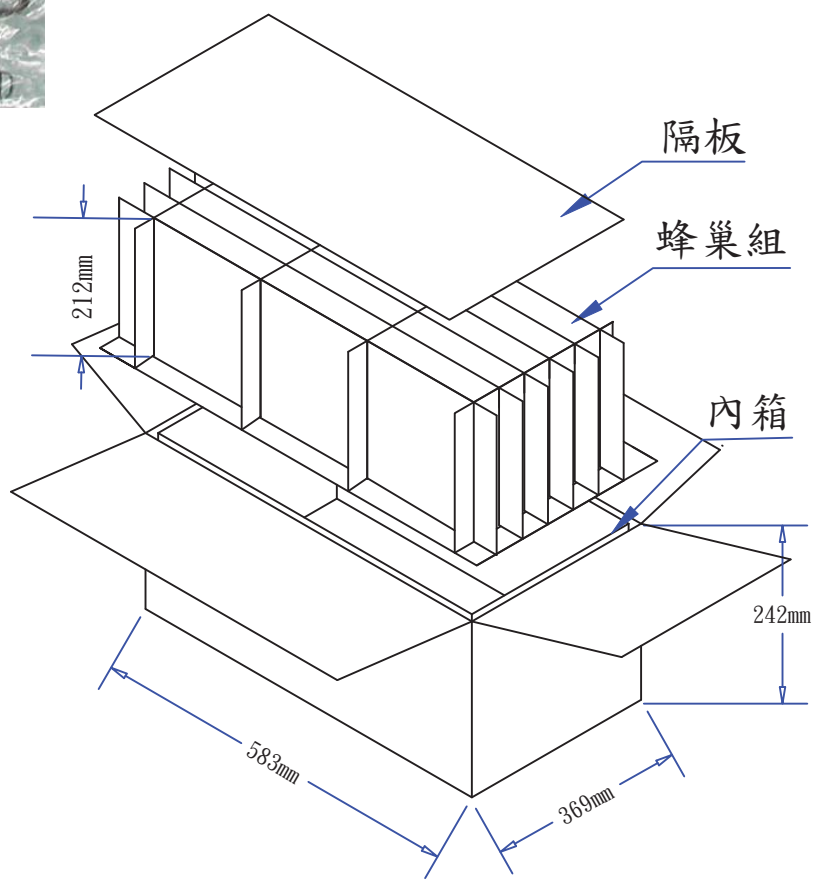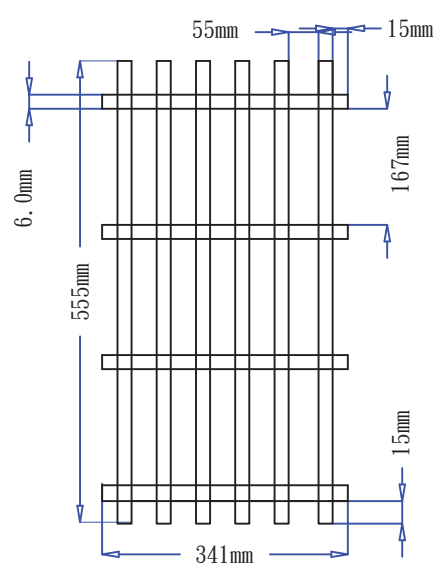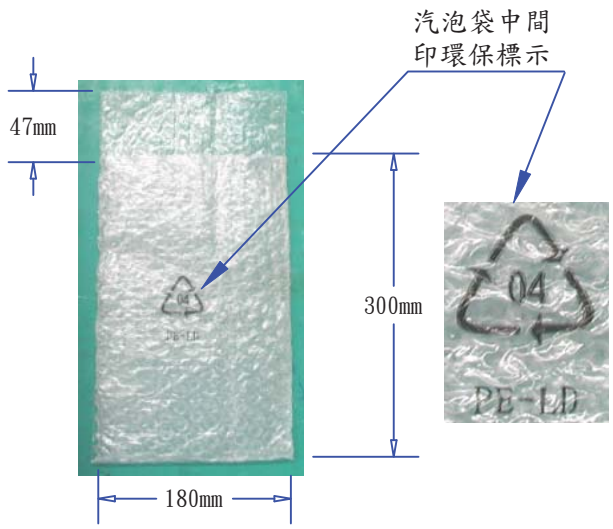

**PIS160W0009 包裝(FOR 160W+AC CORD)(K=K)-環保雙面氣泡袋-內箱-邊分-15**

- 9550046401 1. 隔板:555(L)\*341(W)\*6mm K=K 2/15
- 9520073001 2. 數量:3\*5\*1=15PCS
- 9520073101 3. 內箱:569(L)\*355(W)\*224(H)mm(無上下蓋) K=K 1/15
- 9560044801 4. 外箱:583(L)\*369(W)\*242(H)mm K=K 1/15
- 9560044901 5. 4刀卡:555(L)\*212(W)\*6mm(邊分) K=K 6/15
- 9540005101 6. 6刀卡:341(L)\*212(W)\*6mm(邊分) K=K 4/15
- 7. 環保雙面汽泡袋:300(L)\*180(W)\*47mm 無色透明,中間位置須加印環保標示. 1/1
- 8. 將成品放入氣泡袋中,銘板與環保標示同一側,SR部份朝上裝入蜂巢內, AC線裝入蜂巢位於DC線側,方向須統一.
- 9. 外箱標示為外徑尺寸,以上材料需符合RoHS標準.



阿達特科技股份有限公司  
Adapter Technology Co., Ltd.

DRAWING NO. <b>PIS160W0009</b>		APPROVAL 1 BY		
UNIT	MODEL NO 160W+AC CORD+內箱	APPROVAL 2 BY		
mm	FILE NO. ADT-0713	CHECKED BY(ENGINEER)	Sun	2020/11/07
SCALE	REV. A	SHEET 1/1	DRAWN BY	Moon
				2020/11/07
Apply for sales		Apply for engineer		Use the sales